

T-T Well

Clean Water Well Pump




Features

- Stainless steel construction
- Noryl impeller and diffuser
- Double mechanical seal within oil bath
- 0.75 - 1.5kW output
- 32mm discharge
- Submersion depth: max. 50m
- Liquid temperature up to 40°C
- IP68 motor
- 0.5 - 1.2kW

Applications

- Boosting
- Domestic and Industrial
- Agriculture and Farms
- Irrigation
- Wells up to 50m
- Water distribution

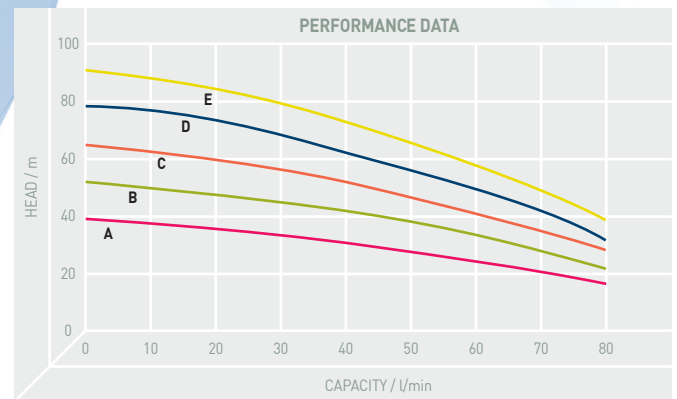

| MODEL | PRODUCT CODE | CURVE | DIAMETER mm | OUTLET " / mm | CABLE LENGTH m | kW | AMPS | WEIGHT kg |
|------------------------|--------------|-------|-------------|---------------|----------------|-----|------|-----------|
| T-T Well 100G 230V/1Ph | PW/WELL100G | A | 130 | 1¼"/32mm | 15 | 0.5 | 3.4 | 17 |
| T-T Well 125G 230V/1Ph | PW/WELL125G | B | 130 | 1¼"/32mm | 15 | 0.6 | 4.4 | 19 |
| T-T Well 150G 230V/1Ph | PW/WELL150G | C | 130 | 1¼"/32mm | 15 | 0.8 | 5.4 | 21 |
| T-T Well 175G 230V/1Ph | PW/WELL175G | D | 130 | 1¼"/32mm | 15 | 1.0 | 6.5 | 24 |
| T-T Well 200G 230V/1Ph | PW/WELL200G | E | 130 | 1¼"/32mm | 15 | 1.2 | 7.4 | 24 |

Note: Complete with float switch.

T-T PUMPS Ltd, Woore, Cheshire, CW3 9RU
 Tel: 01630 647200 Fax: 01630 642100
 www.ttpumps.com email: response@ttpumps.com