

Spring Check Valve

T-T Flow[®]
Valves



Spring return check valve used to prevent reverse flow.

Suitable for clean water applications up to 150°C.

Features

- Silent operation
- Reliable sealing
- Medium head loss
- PN10 flanges
- WRAS approved
- Drilling bosses
- Operational stainless steel strainer
- On request double version, larger sizes, Viton[®] seat, PN16, PN25 or PN40


Materials

- Body: Cast iron EN-GJL-250
- Spring: Stainless steel AISI 302
- Seal: EPDM
- Coating: Fusion bonded epoxy resin

Dimensions (mm)

DN	A	B	C	D	PFA(Bar)	Weight(Kg)
50	100	97	165	80	16	6
65	120	125	185	113	16	8
80	140	150	200	113	16	10
100	170	187	220	137.5	16	15
150	230	250	285	137.5	16	32
200	289	340	340	157	10	53
250	354	420	405	197	10	94
350	396	490	460	250	10	140

Dimensions in mm, unless otherwise stated. DN = Nominal Valve Size.
PFA = Allowable Operating Pressure

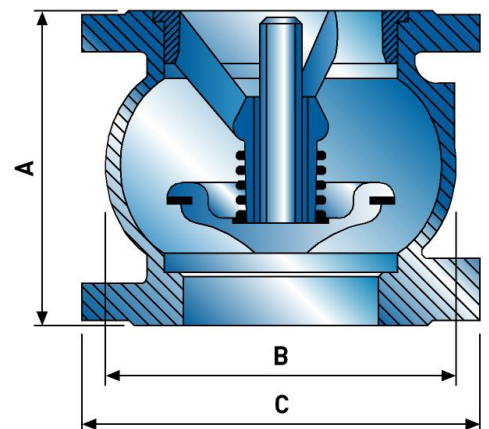

T-T Flow, Woore, Cheshire, CW3 9RU
Tel: 01630 647111 Fax: 01630 642100
www.ttflow.com e-mail: info@ttflow.com

We reserve the right to amend specifications without prior notice.
© T-T PUMPS Ltd. 2016 DATA357: 26/01/2016