



# JE 1-110 G10 MT20/MM20 CENTRIFUGAL PUMP



The J Series are a range of surface mounted self-priming pumps with an open impeller design, ideal for pumping liquid containing large solids. The design of the pump allows self-priming operation, including evacuation of the air from suction pipework, without the need for a foot valve.

## Features:

- Rapid self-priming without foot valve up to a height of 7.5m (24.5 ft)
- High resistance to abrasive liquids and turbid sandy waters
- Semi-open impeller with solids handling up to 20mm
- Easily replaceable wear plate
- Quick release inspection covers for ease of maintenance
- Available in cast-iron and stainless steel
- 230V / 1Ph or 400V / 3Ph versions available.

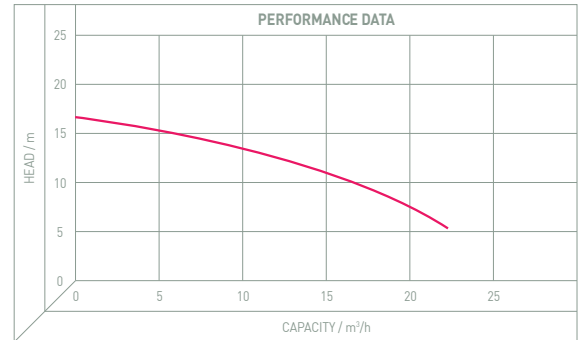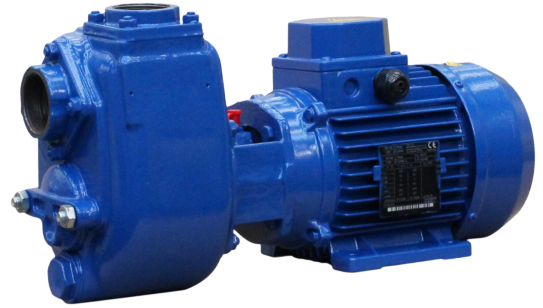

## TECHNICAL SPECIFICATION

SUCTION PORT	THREADED - 1 1/2" BSP
DELIVERY PORT	THREADED - 1 1/2" BSP
QMAX	24 M³/H - 400 L/MIN
HMAX	16.5 M
SOLIDS HANDLING	20 MM
MOTOR POWER	1.1 KW - 1.5 HP
WEIGHT	24 KG (50LB)

## DIMENSIONAL DRAWINGS

