

# JE 3-140 G10 MT20



## CENTRIFUGAL PUMP



The J Series are a range of surface mounted self-priming pumps with an open impeller design, ideal for pumping liquid containing large solids. The design of the pump allows self-priming operation, including evacuation of the air from suction pipework, without the need for a foot valve.

### Features:

- Rapid self-priming without foot valve up to a height of 7.5m (24.5 ft)
- High resistance to abrasive liquids and turbid sandy waters
- Semi-open impeller with solids handling up to 20mm
- Easily replaceable wear plate
- Quick release inspection covers for ease of maintenance
- Available in cast-iron and stainless steel
- 400V / 3Ph only.

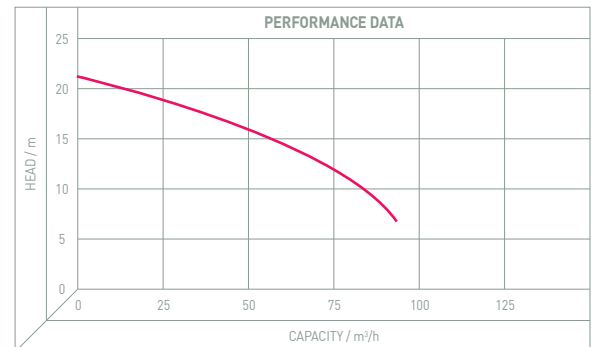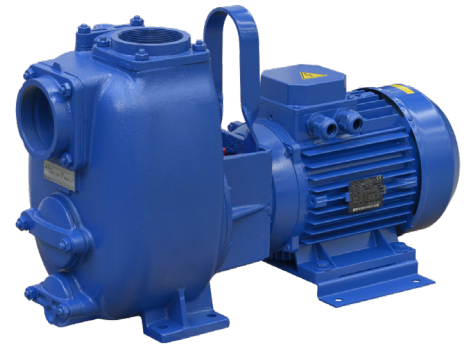

## TECHNICAL SPECIFICATION

SUCTION PORT	THREADED - 3" BSP
DELIVERY PORT	THREADED - 3" BSP
QMAX	95 M <sup>3</sup> /H - 1,580 L/MIN
HMAX	21 M
SOLIDS HANDLING	28 MM
MOTOR POWER	4 KW - 5.5 HP
WEIGHT	70 KG (150LB)

## DIMENSIONAL DRAWINGS

