AUTO-COUPLING SETS
DUCKFOOT - DN100

The auto-coupling is fixed to the bottom of the pump chamber and allows the pump to be raised and lowered without emptying the chamber, making repairs and maintenance of the pump much easier.

The mobile section, an integral part of the pump, descends on the guide-rails connected to the fixed part of the device at the bottom of the chamber, until it self-locates in the correct operating position.

Features:

– Structure in GJL-250 cast iron

– Seal in NBR rubber

– Epoxy-vinyl paint

– Full free passage

– Complete with pipe guide and coupling flange with stainless steel fasteners

– A patented system simplifies pump release and reduces the mechanical stresses on the guide pipes.

TECHNICAL SPECIFICATION

DISCHARGE	DN100 EN1092-2 PN10
SUCTION	DN100 EN1092-2 PN10
COUPLED PUMP MAX. WEIGHT (IF SPECIFIED)	550 Kg
WEIGHT	31 Kg
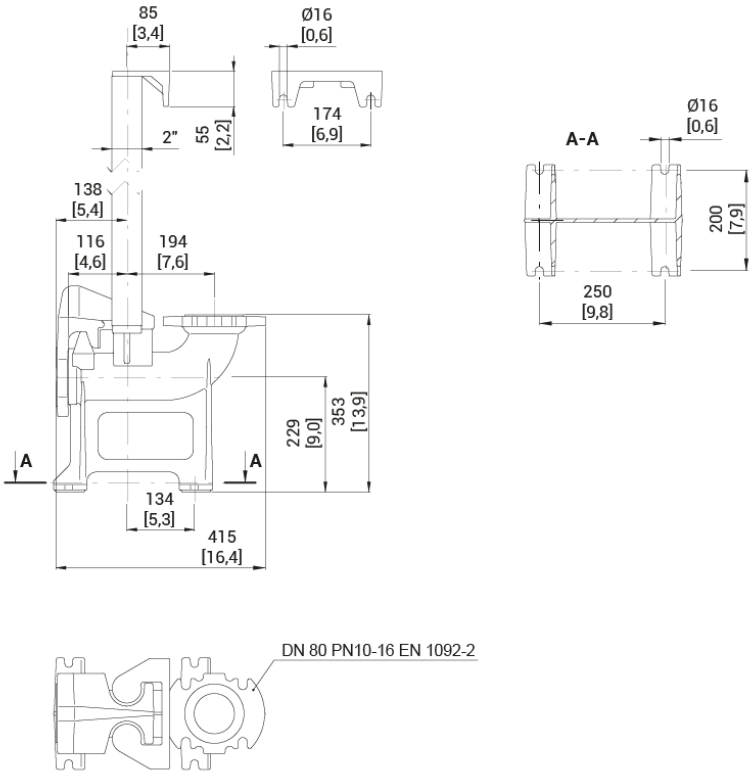
DIMENSIONAL DRAWINGS