



water solutions

Data sheet

DRF 100/4/100 A1CT5




F


series

Technical specification


3~ 50 Hz

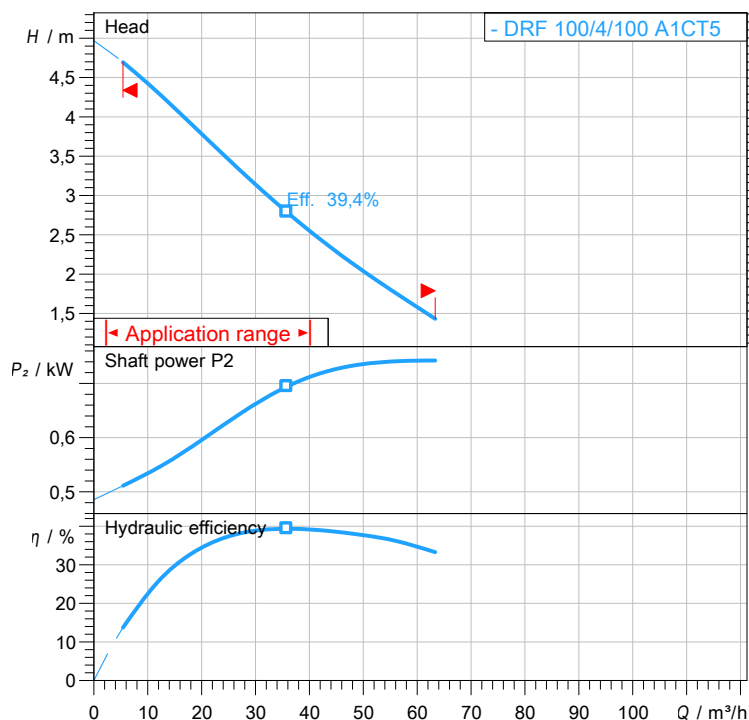 Δp / MPa

Characteristic curves according to UNI EN ISO 9906:2012



DN 100 PN10-16 EN 1092-2

[mm]
[inch]

Pump

Series	F series
Pump name	DRF 100/4/100 A1CT5
Configuration	NGTAB51040S00EX
Standard	ATEX 94/9/CE
ATEX mark	II 2 GD Ex db k IIB T4 Ex tb IIIC T135°C IP68

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	4
Rated power P_2	0,74 kW
Incoming power P_1	1,05 kW
Rated current	2,2 A
rpm	1450 1/min
$\cos \phi$	0,69
Rated torque	4,9 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	H

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m ³
Max. immersion depth	30 m
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	20
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel - AISI 420
Hydraulic	Cast iron - EN-GJL 250
Impeller	Cast iron - EN-GJL 250
Painting/Coating	Bi-epoxy 150 μ m
Screws	Stainless steel - Class A2-70
Gaskets	VITON
Foot base (if present)	Cast iron - EN-GJS 600

Hydraulic

Type	DR (Multi-channel open)
Free passage	50 mm
Impeller type	Open channel impeller
Max. hydraulic efficiency	39,4 %
Suction	DN 80 EN 1092-2
Discharge	DN 100 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Construction features

Cooling system	No cooling jacket
Main cable	4G1.5 + 2x0.75
Control cable	-
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	47 kg
Electrical variant	Thermal protection

* cable's weight not included

Rev. 0 - 16-12-2014

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2017-10-26

zenit.com

Page 1 / 3



water solutions

Data sheet

DRF 100/4/100 A1CT5




F

series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Open channel impeller	Free passage 50 mm	Discharge DN 100	Suction DN 80
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s

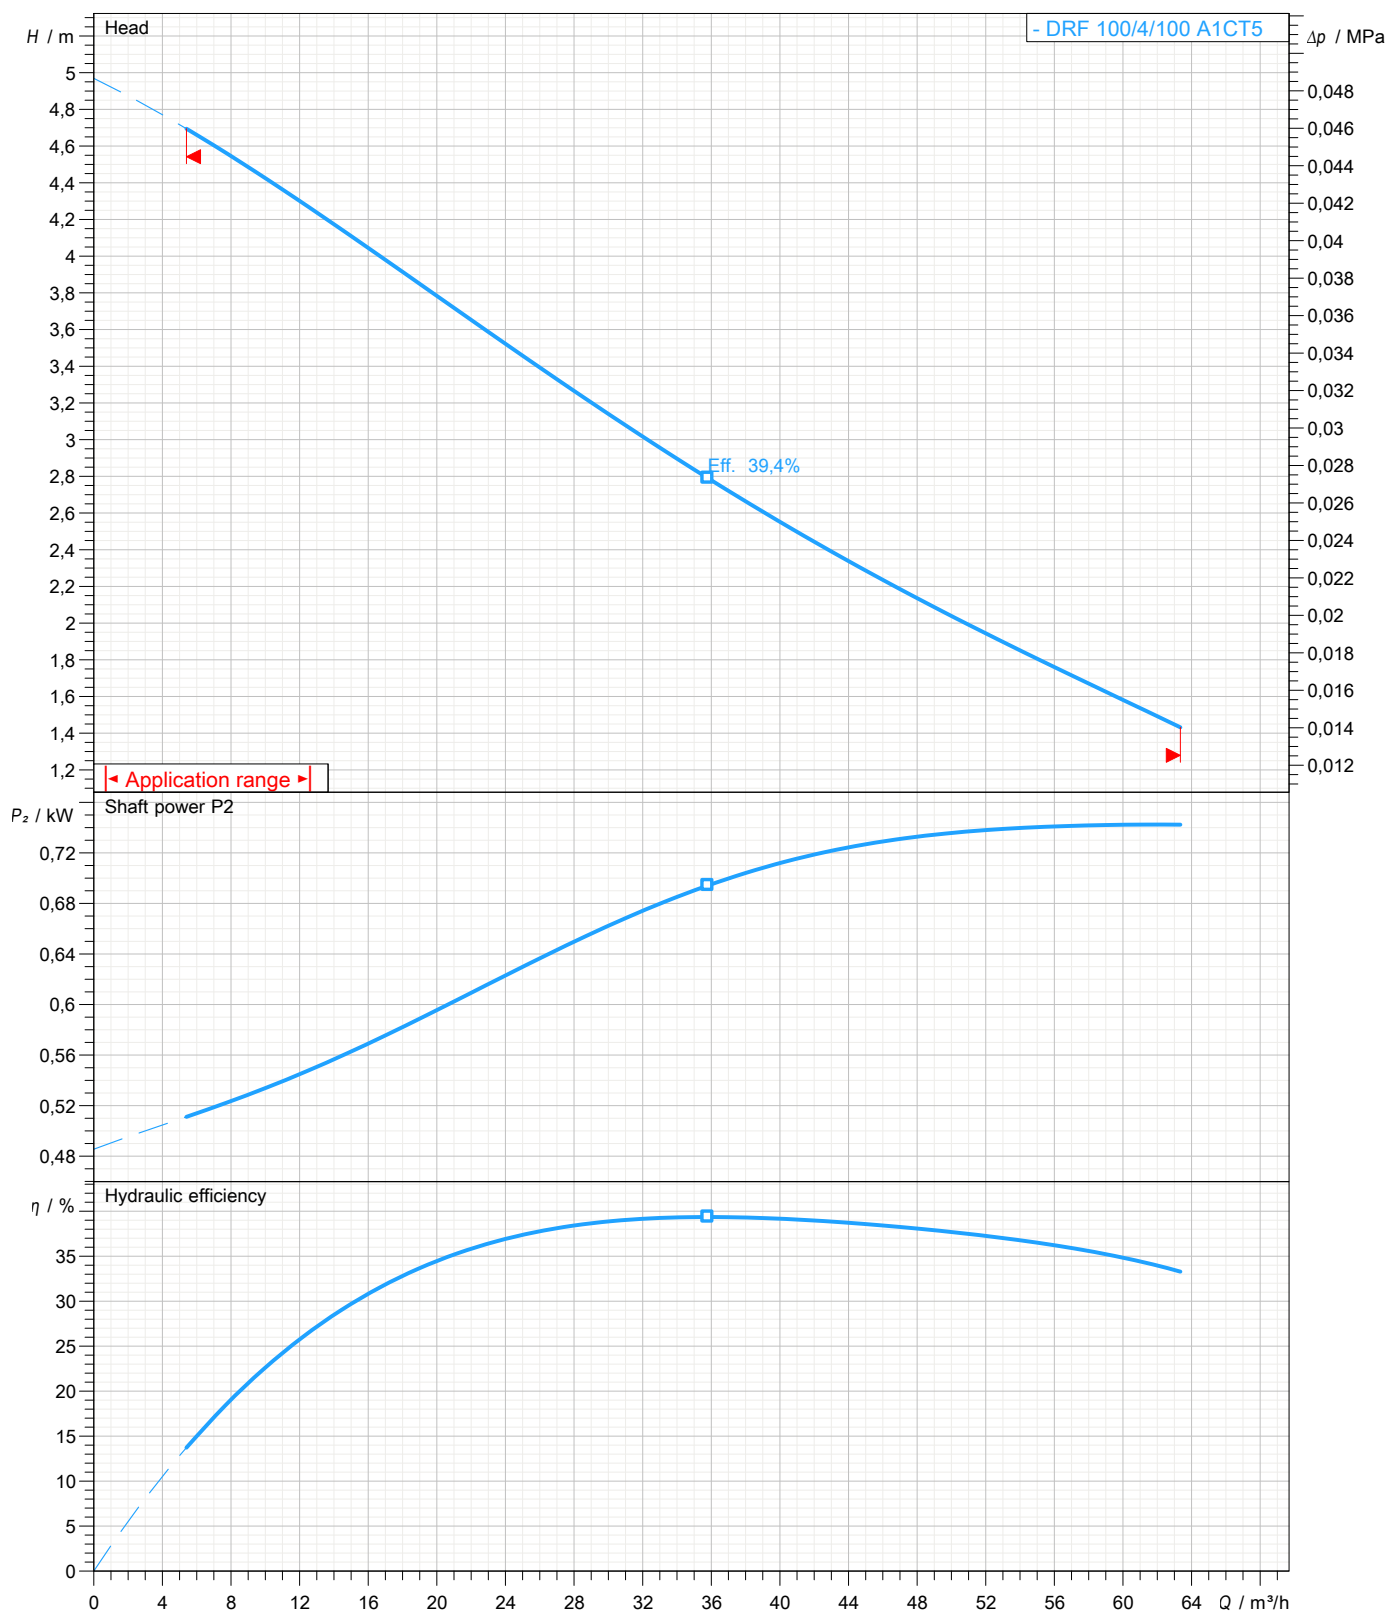

Characteristic curves according to UNI EN ISO 9906:2012



water solutions

Data sheet

DRF 100/4/100 A1CT5



F
series

Dimensional drawing

3~ 50 Hz

Installation type Installation with bottom coupling device - Horizontal outlet

WET/DRY use: WET

Discharge: DN 100 EN 1092-2


Suction: DN 80 EN 1092-2

Pressure rating (suction/discharge): PN 6/PN 10

Accessory *: DAC 100/100H+KAF 116-2" EN (P)

Accessory code *: 9001.019

* Accessory must be ordered separately

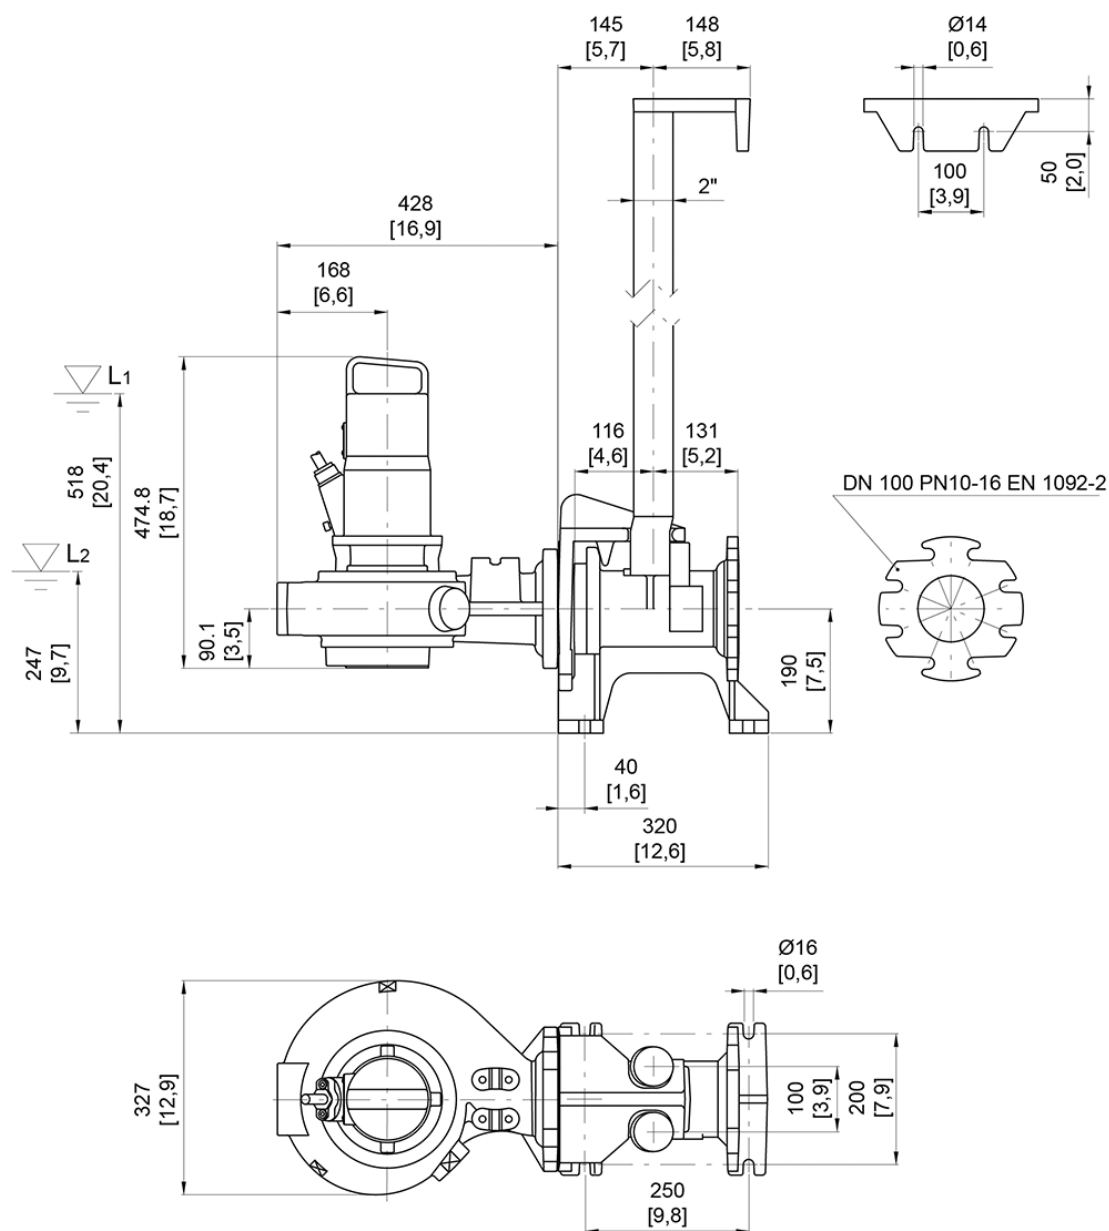

L1: Minimum operating level for continuous use
L2: Minimum operating level for discontinuous use